

Security Cable

Catalog #S218USOR

NEC/CEC: FPLR(ETL)


CABLE CONSTRUCTION:

CENTER CONDUCTOR:
 18 AWG Solid Bare Copper

INSULATION:
 PVC
 Nom. Wall: 0.009"
 Dia. over Insulation: 0.059" Nom.
 Black and Red

SHIELD:
 UnShielded

JACKET:
 Red PVC
 Dia. over Jacket: 0.150"
 Nominal Jacket Thickness: 0.015"

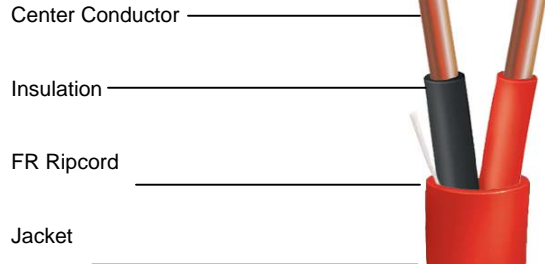

MECHANICAL SPECIFICATION

Cable Weight	16.0 #/MFT
Minimum Bend Radius	1.5"
Operation Temperature -20°C to 75°C	

ELECTRICAL PROPERTIES:

OPERATING VOLTAGE:	300 VRMS
MAX CONDUCTOR DCR:	6.4 Ohms/MFT
CAPACITANCE:	29.0 pF/Ft. Nom.
FLAME TEST:	FPLR NEC ART 760

FEATURES & BENEFITS:

Virgin materials
 Footage marking
 FPLR per NEC Article 760
 Pure copper conductors
 Custom colors, print, lengths available
 (minimum order quantities apply)

APPLICATIONS:

Commercial audio
 Security systems
 Power limited controls
 Sound & audio
 Intercom/PA systems
 Broadcast
 Nurse call

