


Security Cable

Catalog #S414USOR

NEC/CEC: FPLR(ETL)

CABLE CONSTRUCTION:

- CENTER CONDUCTOR:**
14 AWG Solid Bare Copper
- INSULATION:**
PVC
Nom. Wall: 0.013"
Dia. over Insulation: 0.090"
Black, Red, Brown and Blue
- SHIELD:**
UnShielded
- JACKET:**
Red PVC
Dia. over Jacket: 0.250"
Nominal Jacket Thickness: 0.015"

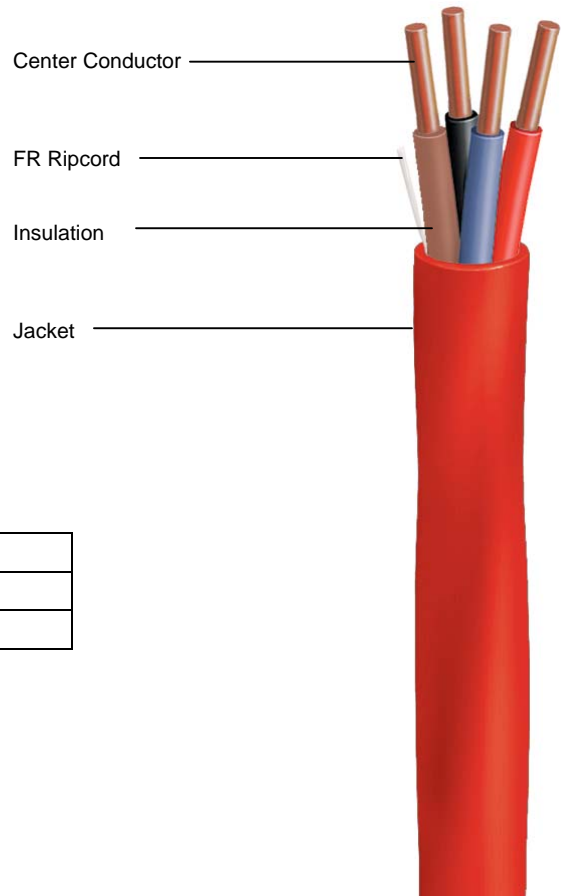

MECHANICAL SPECIFICATION

CABLE WEIGHT	66.00 #/MFT
MINIMUM BEND RADIUS	2.5"
OPERATION TEMPERATURE -20°C to 75°C	

- ELECTRICAL PROPERTIES:**
- | | |
|--------------------|------------------|
| OPERATING VOLTAGE: | 300 VRMS |
| MAX CONDUCTOR DCR: | 2.52 Ohms/MFT |
| CAPACITANCE: | 34.0 pF/Ft. Nom. |
| FLAME TEST: | FPLR NEC ART 760 |

- FEATURES & BENEFITS:**
- Virgin materials
 - Footage marking
 - FPLP per NEC Article 760
 - Pure copper conductors
 - Custom colors, print, lengths available (minimum order quantities apply)

- APPLICATIONS:**
- Commercial audio
 - Security systems
 - Power limited controls
 - Sound & audio
 - Intercom/PA systems
 - Broadcast
 - Nurse call