

DISTRIBUTION BOARD

Three Phase-Compact

DESCRIPTION



Molded from 1.0 mm cold rolled steel, the compact simple design makes this model very economical and durable. With seven available models, our metal distribution boards design meets the needed requirements.

APPLICATIONS

Houses, offices, factories, and hospitals.

SPECIFICATIONS

Available with flush or surface mounted, with metal cover window type. With electrostatic flint gray color base and cover, with 1.5 mm copper buss bar comb type, and with three 10mm solid pvc insulated copper wire which connects between the main three phase switch and the single phase circuit breakers. Polyimide insulators, fiber insulators, earth, neutral buss bars, and wire clamps are included.

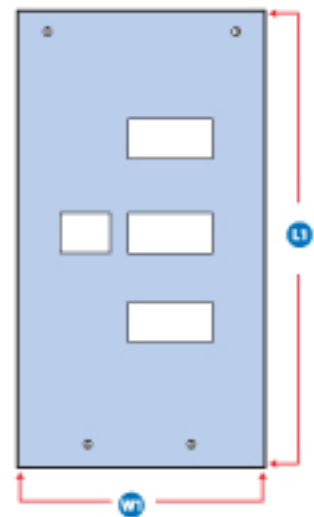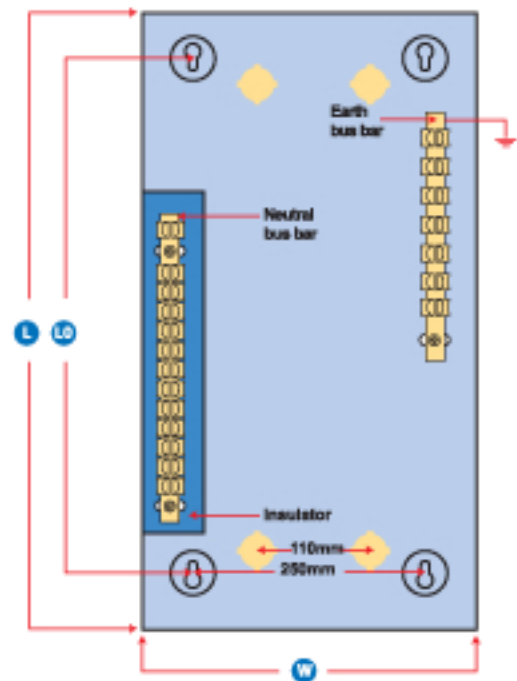

BASE AND COVER DIMENSIONS/ MM

Item	Code no.	Model	L	W	H	L0	L1	W1
1	MB 3 X 4N	12 way	470	295	52	180	490	310
2	MB 3 X 6N	18 way	470	295	52	180	490	310
3	MB 3 X 8N	24 way	470	340	52	240	490	360
4	MB 3 X 9N	27 way	470	340	52	240	490	360
5	MB 3 X 10N	30 way	470	340	52	240	490	360
6	MB 3 X 12N	36 way	470	400	52	240	490	410
7	MB 3 X 14N	42 way	470	400	52	240	490	410

Item no.	Code no.	Model	3 P main switch	Single phase
1	MB 3 X 4N	12 way	1	12
2	MB 3 X 6N	18 way	1	18
3	MB 3 X 8N	24 way	1	24
4	MB 3 X 9N	27 way	1	27
5	MB 3 X 10N	30 way	1	30
6	MB 3 X 12N	36 way	1	36
7	MB 3 X 14N	42 way	1	42