

# F5967BV

## 75 Ohm Coaxial Cable

### Drop Cable

1100 CommScope Place  
 Hickory, NC 28603  
 (800) 982-1708  
 (828) 324-2200  
 Fax: (828) 324-3400  
 Int'l Fax: (828) 323-4989  
[www.commscope.com](http://www.commscope.com)  
 CommScope Properties, LLC  
 All Rights Reserved



**PRODUCT DESCRIPTION:**

**BONDED FOIL, 67% BRAID, PVC JACKET**

**CENTER CONDUCTOR:**

20 AWG COPPER-CLAD STEEL  
 NOMINAL DIAMETER: 0.032" (0.81 mm)

**DIELECTRIC:**

GAS EXPANDED POLYETHYLENE  
 NOMINAL DIAMETER OVER DIELECTRIC: 0.144" (3.66 mm)


**SHIELD:**

**1<sup>ST</sup> SHIELD:** ALUMUNUM-POLYPROPYLENE-ALUMINUM  
 LAMINATED TAPE WITH OVERLAP BONDED TO THE DIELECTRIC  
 NOMINAL DIAMETER OVER TAPE: 0.151" (3.84 mm)

**2<sup>ND</sup> SHIELD:** 34 AWG ALUMINUM BRAID WIRE  
 67% COVERAGE

**JACKET:**

PVC JACKET  
 NOMINAL DIAMETER OVER JACKET: 0.240" (6.10 mm)  
 NOMINAL JACKET THICKNESS: 0.032" (0.81 mm)

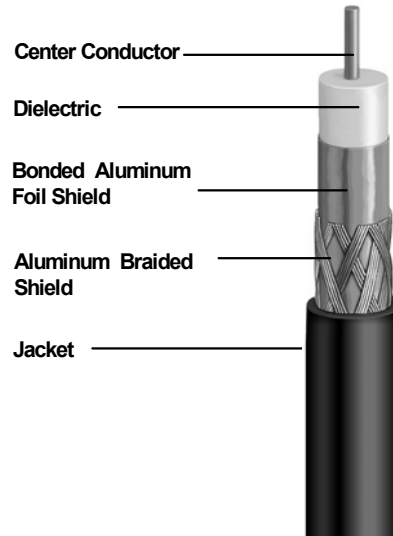

**ELECTRICAL PROPERTIES:**

**IMPEDANCE:** 75.0 +/- 3.0 Ohms  
**VELOCITY OF PROPAGATION:** 85.0% NOMINAL  
**ATTENUATION:** @ 68°F (20°C)

Shipping Weight (Lbs.)/1000': 28 lbs.

@ Frequency MHz	dB/100 ft. (MAX.)	dB/100 meters (MAX.)
5 MHz	0.86 dB	2.82 dB
55 MHz	2.05 dB	6.73 dB
83 MHz	2.45 dB	8.04 dB
187 MHz	3.60 dB	11.81 dB
211 MHz	3.80 dB	12.47 dB
250 MHz	4.10 dB	13.45 dB
300 MHz	4.45 dB	14.60 dB
350 MHz	4.80 dB	15.75 dB
400 MHz	5.10 dB	16.73 dB
450 MHz	5.40 dB	17.72 dB
500 MHz	5.70 dB	18.70 dB
550 MHz	5.95 dB	19.52 dB
600 MHz	6.20 dB	20.34 dB
750 MHz	6.97 dB	22.87 dB
865 MHz	7.52 dB	24.67 dB
1000 MHz	8.12 dB	26.64 dB

*Drawing not to scale.  
 Specifications subject to change.  
 Revision: 08/20/03*